

CC-2000

Converter for driving ultra-high-speed turbo compressors in fuel cell systems.

- Operation of turbo compressor from wide input voltage range (270 – 550 VDC)
- Rated output power: 8 kW
- Sensorless speed control up to 300,000 rpm
- Low voltage power input (8 – 32 VDC) for control




Specifications converter	
High voltage input U_{HV}	100 – 550 VDC
Nominal high voltage input U_{HV}	270 – 550 VDC
Maximum output power (high voltage operation)	8 kW ($U_{HV} > 270$ VDC)
Low voltage power input U_{LV}	8 – 32 VDC (Auxiliary supply)
Maximum frequency/speed	5 kHz/300,000 rpm
Output voltage (peak value phase-phase)	0 – $0.95 \cdot U_{HV}$, max. 460 V
Maximum phase current	35 Arms
Communication interface	CAN 2.0A/B (500 kbps), CAN FD RS422-USB (Service Interface)
Interlock	Passive interlock
Ambient temperature	-30 – 65 °C
Weight	5.7 kg
Dimensions (L x W x H)	250 (293.9) x 189 x 79 mm (11.57 x 7.44 x 3.11 inch)

Cooling	
Coolant	50%/50% water glycol mixture
Coolant temperature	-30 – 65 °C
In-/Outlet connector type	According to SAE J1231 430192
Tube ID	10 mm

Interfaces	
Low voltage and communication interface (X1)	TE Connectivity/AMPSEAL 23 Pos.
High voltage connection	Amphenol/PowerLok 4.0
Motor connection	Amphenol/PowerLok 4.0
Sensor connection (temperature/interlock)	Amphenol/EcoMate
Converter grounding	M6 x 10

All rights reserved. All information in this document is based on Celeroton TurboCell's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton TurboCell. The information herein is subject to change without notification.

Drawing in mm [inch]

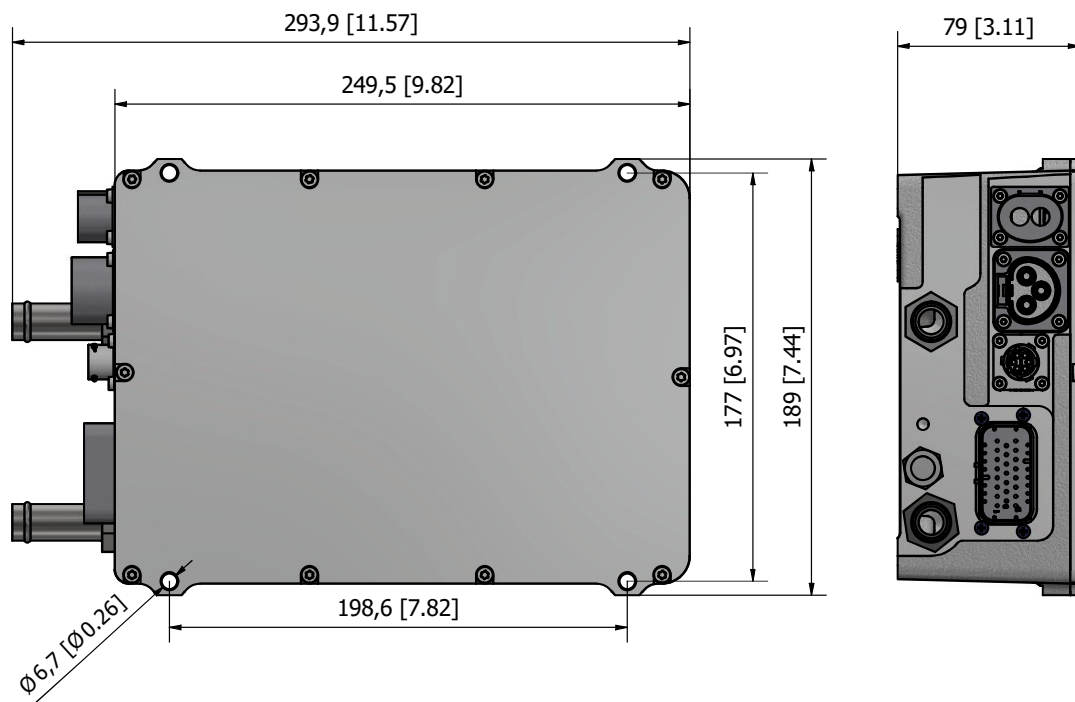

Order codes: CC-2000

Ordering information	Article number
CC-2000	contact sales

Celeroton TurboCell AG | Industriestrasse 22 | 8604 Volketswil | Switzerland
T: +41 44 250 52 20 | info@celeroton-turbocell.com

All rights reserved. All information in this document is based on Celeroton TurboCell's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton TurboCell. The information herein is subject to change without notification.