

CC-550-7500

Converter for driving ultra-high-speed turbo compressors in fuel cells systems.

- Operation of turbo compressor from wide output voltage range of the fuel cell or battery (300–500 VDC)
- Rated output power: 7.5 kW
- Sensorless speed control up to 300,000 rpm
- Protection class IP67
- Low voltage power input (10 - 36 VDC) for control and start-up of the turbo compressor from battery



Specifications converter

High voltage input U_{HV}	100 – 550 VDC
Nominal high voltage input U_{HV}	300 – 500 VDC
Maximum output power (high voltage operation)	7.5 kW ($U_{HV} > 300$ VDC)
Maximum high voltage input current	25 ADC
Low voltage power input U_{LV}	8 – 36 VDC (Auxiliary supply)
Maximum output power for start-up (low voltage operation, input min. 10 VDC)	200 W ($U_{LV} > 10$ VDC) 300 W ($U_{LV} > 12$ VDC)
Maximum frequency/speed	5 kHz/300,000 rpm
Output voltage (peak value phase-phase)	0 – $0.95 \cdot U_{HV}$, max. 460 V
Maximum phase current	24 Arms
Communication interface	CAN 2.0A, CAN 2.0B, SAE J1939, RS422-USB (Service Interface)
Ambient temperature	-30 – 65 °C
Protection class	IP67
Weight	5.4 kg
Dimensions (L x W x H)	300 x 190 x 80 mm (11.8 x 7.5 x 3.1 inch)

Low voltage input

3 x CAN interface	CanH, CanL, CanGND
4 x RS422 interface (Service Interface)	TX-, RX+, TX+, RX-
4 x Low voltage input U_{LV}	2 x LV+, 2 x LV-
5 x PE	Protective earth, connected to the casing
2 x Passive interlock (CC-550-7500.ST1.MCx.SCx only)	IL1, IL2
Connector type	TE Connectivity/AMPSEAL 23 Pos.

All rights reserved. All information in this document is based on Celeroton TurboCell's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton TurboCell. The information herein is subject to change without notification.

Cooling	
Liquid	50%/50% water glycol mixture
Coolant temperature	-30 – 65 °C
In-/Outlet connector type	According to SAE J1231 430192
Tube ID	10 mm

Converter grounding	
Grounding thread	M5 x 10

Order codes: CC-550-7500.STx.MCx.SCx

Supply type	
ST1	HV DC connector
2 x High voltage input U_{HV}	HV+, HV-
Shield	Integrated
Connector type	Amphenol/PowerLok 4.0
Interlock	Passive Interlock
ST2	HV DC cable
2 x High voltage input U_{HV}	HV+, HV-
1 x PE	Protective earth, connected to the casing
Shield	Cable shield connected to the casing
Cable type	Huber&Suhner 3 x 2.5 mm ² RADOX 155S FLR / RADOX Elastomer S
Cable length	1 m (open end)

Motor cable	
MC1	Motor cable without temperature sensor
3 x Motor phase	U, V, W
1 x PE	Protective earth, connected to the casing
Shield	Cable shield connected to the casing
Cable type	LAPP Ölflex Heat 125 C MC 4G4
Cable length	1 m (open end)
MC3	Motor cable with circular connector and integrated temperature sensor
3 x Motor phase	U, V, W, PT100+, PT100-
1 x PE	Protective earth, connected to the casing
Shield	Cable shield connected to the casing
Cable type	Lapp ÖLFLEX® SERVO FD 796 CP (4 G 4 + (2 x 1,5))
Cable length ¹	0.3 m
Connector type	Hummel M23 TWILOCK cable connector

¹ Other cable lengths available upon request


All rights reserved. All information in this document is based on Celeroton TurboCell's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton TurboCell. The information herein is subject to change without notification.

Sensor cable	
SC1	No temperature sensor cable
SC2	Sensor cable for temperature measurement
2 x Temperature sensor	PT100+, PT100-
Shield	Cable shield connected to the casing
Cable type	LAPP Öflex Heat 125 C MC 2G0.5
Cable length	1 m (open end)

Accessories	
Supply cable CC-550-7500 (Connector X1)	Low voltage input cable with CAN 1 m (open ends)
Service cable CC-550-7500 (Connector X1)	Low voltage input cable with CAN and RS422-USB converter 1 m (open ends)
HV supply cable CC-550-7500	PowerLok 4.0 connector, shielded 4 mm ² cable 2 m (open ends)

Ordering information	Article number
CC-550-7500.ST1.MC1.SC1	contact sales
CC-550-7500.ST1.MC1.SC2	contact sales
CC-550-7500.ST1.MC2.SC1	contact sales
CC-550-7500.ST1.MC3.SC1	contact sales
CC-550-7500.ST2.MC1.SC1	contact sales
CC-550-7500.ST2.MC1.SC2	contact sales
Supply cable CC-550-7500 1 m (open ends)	contact sales
Service cable CC-550-7500 1 m (open ends)	contact sales
HV supply cable CC-550-7500 2 m (open ends)	contact sales

Drawing in mm (inch)

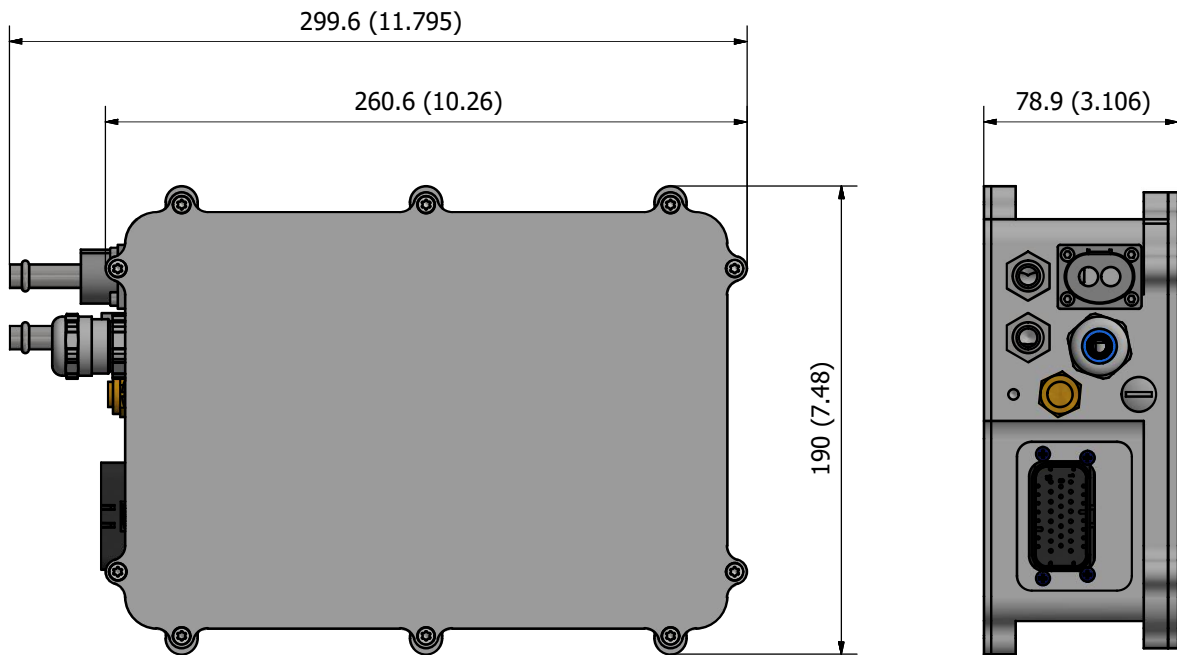

Celeroton TurboCell AG | Industriestrasse 22 | 8604 Volketswil | Switzerland
T: +41 44 250 52 20 | info@celeroton-turbocell.com

All rights reserved. All information in this document is based on Celeroton TurboCell's best knowledge and is not to be considered as a warranty or quality specification. The information given is designed as a guidance and customers are requested to check the suitability and usability of the product in their specific application with consulting Celeroton TurboCell. The information herein is subject to change without notification.